




SETTINGS: DEFAULT

F1 LOD	Reject	Warning	Coupling
F2 ROD	Reject	Warning	Coupling
F3 LID	Reject	Warning	Coupling
F4 RID	Reject	Warning	Coupling
F5 LL1	Reject	Warning	Coupling
F6 RL1	Reject	Warning	Coupling
F7 LL2	Reject	Warning	Coupling
F8 RL2	Reject	Warning	Coupling
F9 TU	Reject	Warning	Coupling
F10 TD	Reject	Warning	Coupling

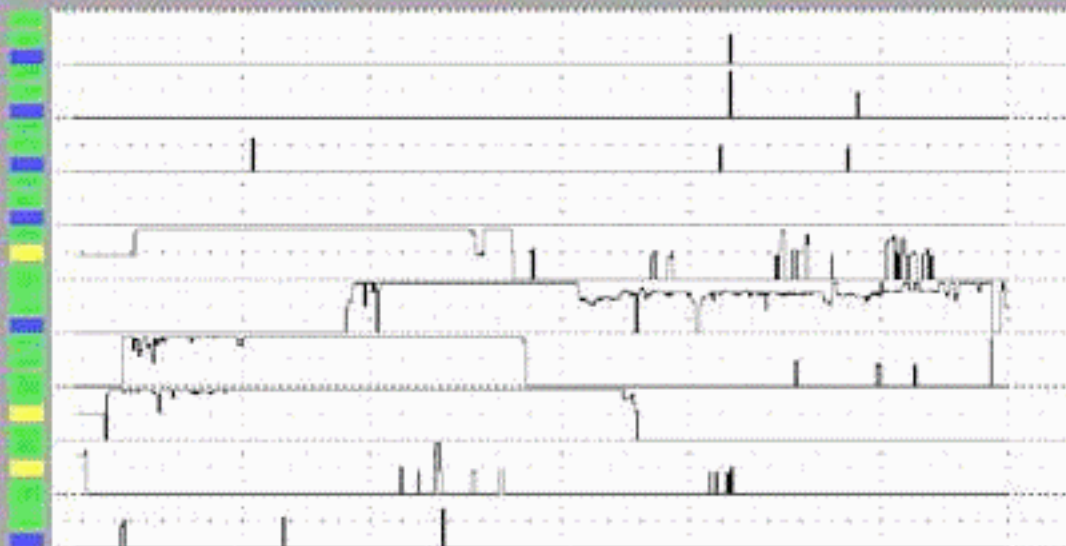

(C) COUPL

PLC READY

TESTING

MANUAL

CALIB ON

ACCEPTED

REJECTED

M1 WELD

Dec 05, 1998